


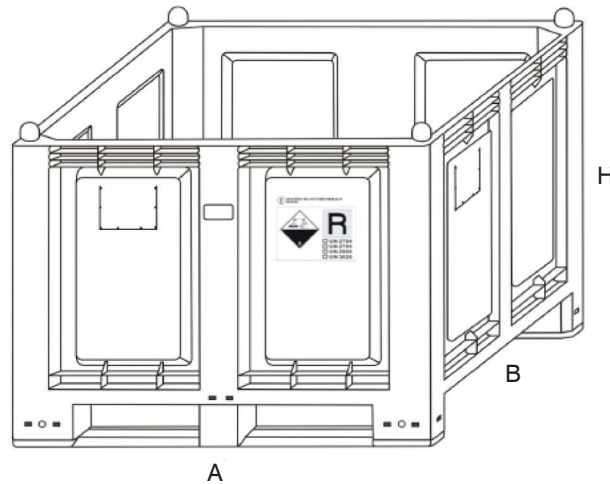


**LARGE CONTAINERS / LOGISTICS AND HANDLING****CARGOPALLET 600 NEW PLUS
FOR SUITABLE FOR HAZARDOUS SOLID
(Lithium Batteries)**

The CARGOPALLET 600 NEW PLUS is available in the version approved for land and rail transport and for the storage of solid dangerous products in compliance with ADR regulations. The container is equipped with a string and an identification label showing the 4 types of lithium batteries that can be stored: UN 3480, UN 3481, UN 3090 and UN 3091. Equipped with two bars on the long side, it is forkable, versatile and robust. It has excellent structural rigidity and resistance to deformation, smooth internal walls and can be stored outdoors.

Capacity max:	550 liters
Max loading capacity:	500 kg (NOT STACKABLE)
Container mass:	30 Kg.
Cover mass:	4,1 Kg.
liner mass:	480 g.
LDPE liner thickness:	0,15 mm
Accessories:	With label holder, internal liner and lid to be fixed with steel straps.
Colours:	 Grey RAL 7001
Material:	  HDPE Inert to acids, hydrocarbons, alkalis and solvents.

Size


ARTICLE	EXTERNAL SIZE mm			INTERNAL SIZE mm		
	A	B	H	A	B	H
CARGOPALLET 600 NEW PLUS with 2 runners for suitable for hazardous solid	1200	800	850	1130	725	690
Height of feet			120			
Gap between feet	830	600				
Wheelbase between the 2 cylinder/spherical pins	1120	720				

The sales office is at your disposal to advise the version most suited to your needs.



LARGE CONTAINERS / LOGISTICS AND HANDLING


**COVER CARGOPALLET 600 NEW PLUS
FOR SUITABLE FOR HAZARDOUS SOLID
(Lithium Batteries)**

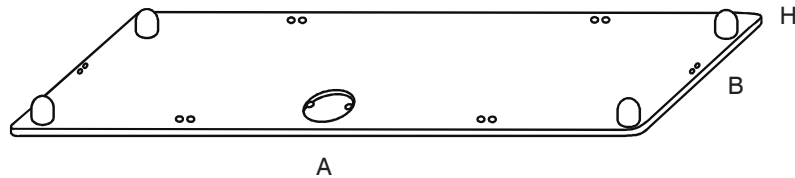

Size

ARTICLE	EXTERNAL SIZE mm			INTERNAL SIZE mm		
	A	B	H	A	B	H
COVER CARGOPALLET 600 NEW PLUS for suitable for hazardous solid.	1215	815	30/65			

**CARGOPALLET 600 PLUS
FOR SUITABLE FOR HAZARDOUS SOLID
Assembled product**

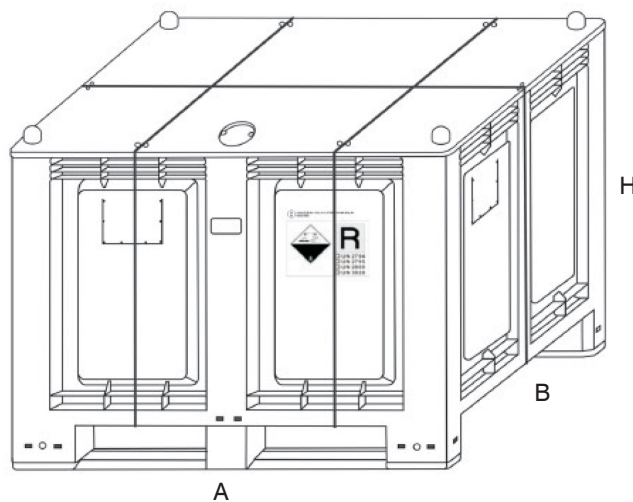

Size

ARTICLE	EXTERNAL SIZE mm			INTERNAL SIZE mm		
	A	B	H	A	B	H
CARGOPALLET 600 NEW PLUS with 2 runners for suitable for hazardous solid. Assembled with steel straps	1200	800	850	1130	725	690
Height of feet			120			
Gap between feet	830	600				
Wheelbase between the 2 cylinder/spherical pins	1120	720				